

CL Challenger Lifts

STANDARD LINE

2023 AUTOMOTIVE LIFTING SOLUTIONS

VERSYMMETRIC® TECHNOLOGY

Challenger Lifts' Versymmetric® technology brings flexibility to any service bay while also ensuring the safe lifting of any vehicle. **Versymmetric® lift technology, established in 1992 by Challenger, combines a Symmetric and an Asymmetric lift into one!**

Safely accommodating vehicles from compact cars to full-size trucks, our Versymmetric® lifts use an offset arm design that allows you to service a wide range of vehicles from the same service bay.

- Challenger's Versymmetric® Technology, with a 3-Stage offset front arm design, allows for the safe symmetric lifting of trucks or asymmetric lifting of other small vehicles within the same service bay.
- DirectSPOT™ Technology, created by the Versymmetric® offset arms, **allows the user to save time spotting a short wheelbase vehicle by eliminating the struggle to re-position vehicles as is the case with most symmetrically designed lifts.**







10K VERSYMMETRIC® 2-POSTLIFT

MODEL # VLE10


Challenger's VLE10 brings flexibility to any service bay with 3-Stage Versymmetric® Front arms and 2-Stage Rear arms. It's 11' 11⁷/₈" column height fits in shops with 12' ceilings. Double telescoping screw pads, jacketed pulley-less single-point mechanical lock release and rubber door guards all come standard.



REQUIREMENTS

-  **12' MINIMUM**
-  **14' RECOMMENDED**
-  **24' RECOMMENDED**
-  **208-230V, 1PH, 20A**

SPECIFICATIONS

MODEL NUMBER	VLE10
Lift Configuration	Versymmetric®
Rise Height	74¾"
Overall Height	11' 11 ⁷ / ₈ " or 13' 11" w/ ext LE2P10EH2
Overall Width	10' 11 ⁵ / ₈ "
Drive Thru Clearance	8' 2 ³ / ₈ "
Floor to Overhead Switch	Standard 11' 5"
Front Arm Reach	Min 22 ⁵ / ₁₆ " Max 39 ³ / ₈ "
Rear Arm Reach	Min 38 ³ / ₈ " Max 55 ³ / ₈ "
Screw Pad Height	Min 4¼" Max 6¾"
Required Ceiling Height	Standard 12'
ALI® Certified	





10K 2-POST LIFT

MODEL # SA10

Challenger Lifts 10,000 lb. 2-Post lift, the SA10, features the ability to be installed in either a symmetric or an asymmetric (turn column) configuration to suit the service requirements of your particular shop.

Features **3-Stage front arms** with maximum extension and retraction, ensuring safe and reliable lifting on all vehicles within rated capacity. With adjustable height and width options, double telescoping screw pads, durable powder coat finish, plated arm restraints and pins, **the SA10 will accommodate the demands of any full-service facility.**

REQUIREMENTS

-  **12' MINIMUM**
-  **14' RECOMMENDED**
-  **24' RECOMMENDED**
-  **208-230V, 1PH, 20A**

2-POST UPGRADES



TIRE TOOL CENTER

PART # B99700

Saves space by allowing technicians to mount tools directly to the column, quickly within reach.



AIR/ELECTRIC WORKSTATION

PART # B10264A

Provides electricity and air mounted directly to the lift column for ultimate convenience for technicians.

AVAILABLE COLORS



MODEL # SA10




7K TURF RAIL

MODEL # TR07

Challenger's patented 7,000 lb.* Turf Rail attachment for all 9K, 10K & 12K 2-Post lifts will pick up turf and all-terrain equipment, with **wheelbases ranging from 26" to 116"** and **up to 89" in track width.**

* Lift capacity ratings are based on loads equally distributed, 3,500 lb. per tray

SPECIFICATIONS





MODEL NUMBER	SA10			
Lift Configuration	Symmetric	Symmetric w/ 2' ext SA10EH2	Asymmetric	Asymmetric w/ 2' ext SA10EH2
Rise Height	74 ⁷ / ₈ "			
Overall Height	11' 10 ¹ / ₂ "	13' 10 ¹ / ₂ "	11' 10 ¹ / ₂ "	13' 10 ¹ / ₂ "
Overall Width	10' 9" or 11' 3"		10' 11 ¹ / ₂ " or 11' 5 ¹ / ₂ "	
Drive Thru Clearance	7' 8 ³ / ₄ " or 8' 2 ³ / ₄ "		7' 4 ¹ / ₂ " or 7' 10 ¹ / ₂ "	
Floor to Overhead Switch	10' 11 ¹ / ₈ " / 11' 5 ¹ / ₈ "	12' 11 ¹ / ₈ " / 13' 5 ¹ / ₈ "	10' 11 ¹ / ₈ " / 11' 5 ¹ / ₈ "	12' 11 ¹ / ₈ " / 13' 5 ¹ / ₈ "
Front Arm Reach	Min 22 ³ / ₈ " Max 41 ¹ / ₂ "			
Rear Arm Reach	Min 38 ¹ / ₄ " Max 59"			
Screw Pad Height	Min 4 ³ / ₄ " Max 6 ⁷ / ₈ "			
Rise Time	44s			
Required Ceiling Height	12'	14'	12'	14'
ALI [®] Certified				


9K OPEN-TOP LIFT

MODEL # CLFP9

Challenger's 9,000 lb. capacity 2-post lift boasts standard 3-stage front and rear arms that offer maximum sweep, arm retraction, and reach. **Our open-top design allows accommodation of any vehicle height**, making it a great addition to the home enthusiast garage and professional vehicle service shops.

REQUIREMENTS

-  **10' 2" MINIMUM**
-  **14' RECOMMENDED**
-  **24' RECOMMENDED**
-  **208-230V, 1PH, 20A**

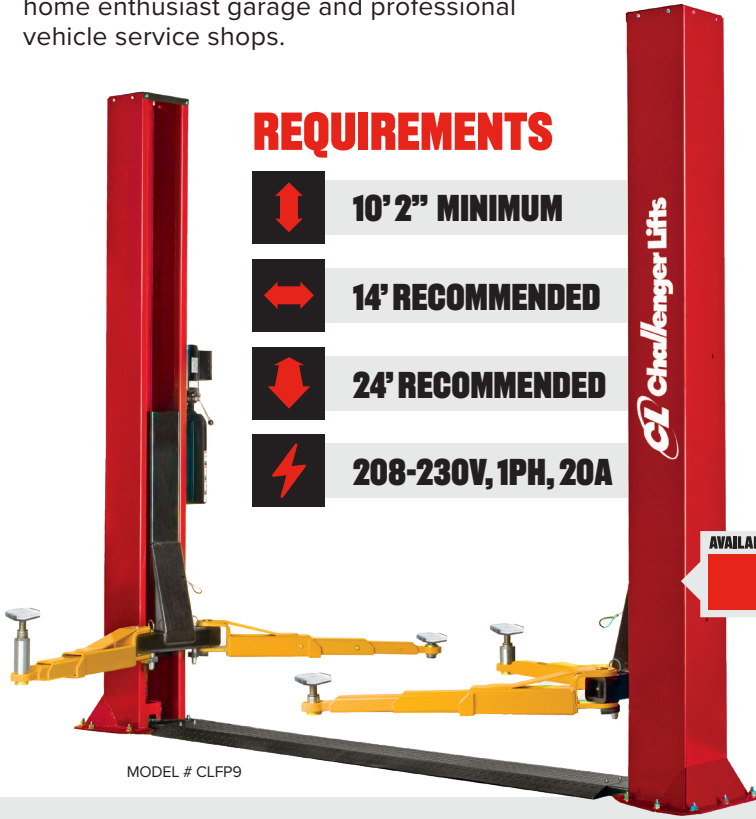

MODEL # CLFP9

AVAILABLE COLORS



SPECIFICATIONS

MODEL NUMBER	CLFP9
Rise Height	6' 5 7/8"
Overall Height	10' 7/8"
Overall Width	11' 5 1/2"
Drive Thru Clearance	8' 2 3/16"
Front Arm Reach	Min 24 1/2" Max 44 1/2"
Rear Arm Reach	Min 24 1/2" Max 44 1/2"
Screw Pad Height	Min 4" Max 6"
Rise Time	50s
Required Ceiling Height	10' 1 1/8"



BLACKOUT KIT

PART # 10700


Manually lower a lift in the event of a power outage.

HEAVY-DUTY 2-POST LIFTS

MODEL # LE12 & E15

Challenger's LE12 (12K) and E15 (15K) are the perfect economic 2-Post lifts for servicing trucks and other vehicles. Heavy-duty 2-Stage front and rear arms offer symmetric lifting capability. **Also, adjustable column height accommodates higher profile vehicles while providing ample servicing headroom.**





SPECIFICATIONS

MODEL NUMBER	LE12	E15
Lifting Capacity	12,000lb	15,000lb
Rise Height	6' 5 3/4"	
Overall Height	13' 10" / 14' 7"	14' 6" / 16' 6"
Overall Width	11' 7 3/4"	12' 3 1/16"
Drive Thru Clearance	8' 7"	9' 1 3/8"
Floor to Overhead Switch	13' 3 1/2" / 14' 1/2"	13' 10" / 15' 10"
Front Arm Reach	Min 35 3/4" Max 54 1/2"	Min 36 1/2" Max 55"
Rear Arm Reach	Min 35 3/4" Max 54 1/2"	Min 36 1/2" Max 55"
Screw Pad Height	Min 5 1/4" Max 6 3/4"	
Rise Time	61s	75s
Required Ceiling Height	13' 11" / 14' 8"	14' 7" / 16' 7"
Height Extension	Part # K2P12EH2 +2'	No
ALI Certified		



MODEL # LE12

REQUIREMENTS

-  **13' 11" (12K) 14' 7" (15K) MINIMUM**
-  **14' (12K) 15' (15K) RECOMMENDED**
-  **24' (12K) 28' (15K) RECOMMENDED**
-  **208-230V, 1PH, 20A**

FOOTPADS & ADAPTERS

Our telescoping screw pads provide simple access to vehicle lift points by screwing up or down to ensure level lifting.*



STANDARD FOOTPAD

PART # B2270 (Sold individually)

Premium double-telescoping polyurethane screw pads, the standard for our 10,000 lb. capacity 2-Post and inground lifts.

Pad Replacement: # A1104-H



ROUND RUBBER FOOTPAD

PART # B2260 (Sold individually)

Optional round rubber double telescoping footpads for our 10,000 lb. capacity 2-Post and inground lifts.

Pad Replacement: # B2208



GM® TRUCK FOOTPAD SET

PART # B2280PR (Sold in pairs)

Extra-wide, heavy-duty polyurethane footpads designed for '19+ model GM® half-ton trucks, including Chevrolet®, GMC®, and Cadillac®.

Pad Replacement: # B2280-01



ELECTRIC VEHICLE FOOTPAD KIT ⚡

PART # TFPK (Sold in sets of 4)

Designed to support select electric vehicles, fits most Challenger 2-Post Lifts.

Pad Replacement: # 482365



CAB-OFF FOOTPAD KIT

PART # B2290 (Sold in sets of 4)

Designed to safely lift cabs off truck frames with pads that feature a u-channel to cradle the pinch welds.

Pad Replacement: # B2290-01

NEW!

Footpads & Adapters compatible with VLE10, SA10, CLFP9 & LE12*

STACK ADAPTERS

Drop-in style stack adapters help reach pickup points on vehicles with running boards or side steps. Lift out the screw pad, drop in the stack adapter extension and replace the screw pad to reach lifting points.



3" STACK ADAPTER

PART # B2206-3
Sold individually.



6" STACK ADAPTERS

PART # 10313
Sold in pairs.



FRAME ADAPTERS

PART # 10314
Sold in pairs.



ORGANIZER RACK

PART # 10316
Sold in pairs.



STACK ADAPTER KIT

PART # 10315
(4) 3" Stack Adapters
(2) 6" Stack Adapters
(2) Organizer Racks



SPRINTER KIT

PART # 10333
(2) Cradle Adapters
(2) Pin Adapters






14K 4-POST LIFT


MODEL # 4P14EFX & 4P14XFX

Challenger's 14,000 lb. closed-front drive-on 4-Post lift features a **low approach angle and wide runways**. We designed the 4P14 for dependability with louvered approach ramps that provide traction even in wet conditions.


Choose between two lengths, standard (4P14EFX) or extended (4P14XFX), and a range of optional accessories like rolling jacks or our bolt-on alignment kit.

REQUIREMENTS

-  **78" RISE + VEHICLE**
-  **14' RECOMMENDED**
-  **28' (XFX) 25' (EFX)**
-  **208-230V, 1PH, 20A**
-  **90-120 PSI**

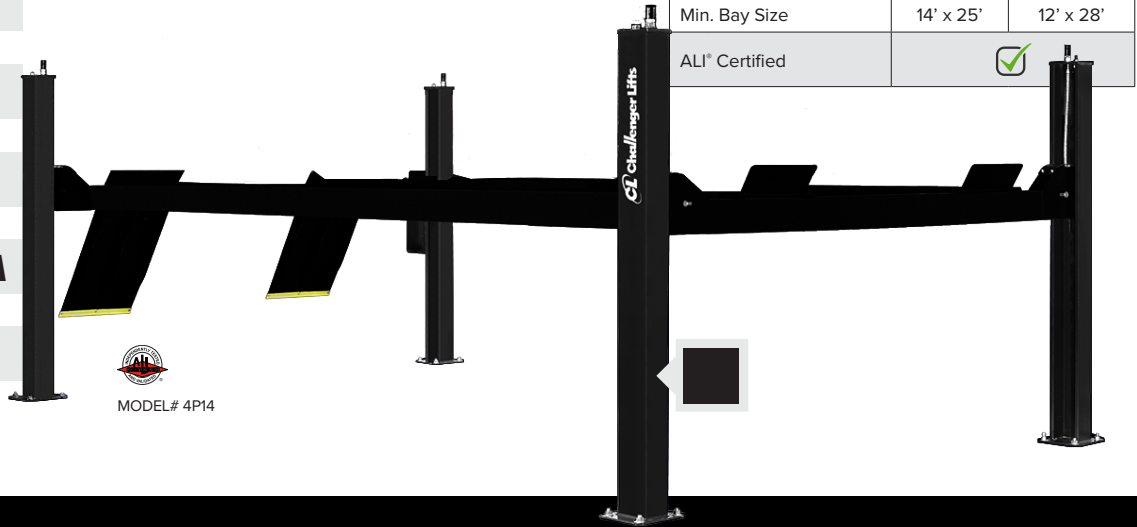

SPECIFICATIONS

PART NUMBER	4P14EFX	4P14XFX
Rise Height	6' 6"	
Overall Length	20' 5¾"	22' 9¼"
Overall Width	10' 10¾"	
Inside Columns	9' 8"	
Between Columns	16' 4"	18' 7½"
Height of Columns	7' 6½"	
Width of Runways	20"	
Height of Runways	7¼"	
Width Between Runways	40" / 43"	
Rise Time	75s	
Min. Bay Size	14' x 25'	12' x 28'
ALI® Certified		

4-POST UPGRADES

ROLLING JACKS

Rolling jacks are a great addition to any auto repair shop or garage looking to take full advantage of our 4-Post lifts. **Eliminate the need to use manual and awkward bottle jacks and install a pair of rolling jacks.** These jacks roll easily along the accessory rail and include extendable widths and adapters to ensure you can reach vehicle pick-up points.

- Low-profile, adjustable height allows for an unobstructed workspace when not in use
- Two-hand use ensures technician safety

PART NUMBER	DESCRIPTION
RJ7.5	Air/hydraulic operated rolling jack - adjustable width, 7,500 lbs. capacity.

ADAPTER KITS

PART #	DESCRIPTION
10333-RJ	Sprinter® Adapter Kit
10355-6	Pair of 6" stack extensions.
10355-9	Pair of 9" stack extensions.

AIRLINE KITS

PART #	DESCRIPTION
40230-E	Optional airline kit for 4P14EFX
40230-X	Optional airline kit for 4P14XFX

RAMP KITS

PART #	DESCRIPTION
10266	36" Louvered ramp kit
10266L	52" Extended or Low Profile Ramp Kit

ALIGNMENT KITS

PART NUMBER	DESCRIPTION
40200-3D	Bolt-on alignment kit without turn plates - 3D alignment compatible
40200-3DBK	Bolt-on alignment kit with black powder coated turn plates - 3D alignment compatible
40200-3DSS	Bolt-on alignment kit with stainless steel turn plates - 3D alignment compatible



10K SHORT-RISE LIFT

MODEL # SRM10

With a brake and express tire service specialty, this low-rise 10,000 lbs. lift has a surprisingly small footprint for all its capabilities. While lifting small passenger cars to light trucks, **the lift's louvered approach ramps will bring better traction while spotting vehicles.** Standard spotting blocks and optional auxiliary adapters reach a more comprehensive range of vehicle lift points. Flush- and Surface-mount options are available.



MODEL # SRM10

SPECIFICATIONS

MODEL NUMBER	SRM10
Rise Height	22"
Overall Length	92 $\frac{7}{8}$ "
Overall Width	85" (+2 $\frac{1}{2}$ " for handle)
Outside Width of Platforms	72"
Width Between Platforms	23"
Overall Platform Length	50"
Overall Ramp and Platform Length	82 $\frac{1}{2}$ "
Low Adapter Position	4 $\frac{3}{4}$ "
High Adapter Position	6 $\frac{3}{4}$ "
Lowered Height	4 $\frac{1}{4}$ "
Locking Bar Heights	13 $\frac{3}{4}$ ", 18 $\frac{1}{4}$ ", 21 $\frac{1}{4}$ "
Rearward Movement	13 $\frac{1}{4}$ "
Standard Motor/Voltage	1HP, 115v, 60Hz, 1Ph
ALI [®] Certified	

STANDARD ADAPTERS



2-POSITION ADAPTER
PART # SR10-001
Set of 4.

OPTIONAL SPOTTING BLOCKS



1 $\frac{1}{2}$ " SPOTTING BLOCK
PART # 10549
Set of 4.



3" x 4" x 5" U-CHANNEL
PART # 63100
Set of 4.

REQUIREMENTS



10' MINIMUM



12' RECOMMENDED



24' RECOMMENDED



208-230V, 1PH, 20A

6K PORTABLE MID-RISE LIFT

MODEL # MR6

Capable of operating indoors or out, this 6,000 lbs. lift saves valuable shop space while lifting small passenger cars to light-duty trucks for brake and tire service. **Reach a more comprehensive range of vehicle lift points with included auxiliary adapters.** Additional features include a rotating arm design with rubber pads and a low drive-over clearance.



MODEL # MR6

SPECIFICATIONS

MODEL NUMBER	MR6
Rise Height	53"
Overall Length	94"
Overall Width	40"
Min. Collapsed Table Height	5 $\frac{1}{2}$ "
Pad Height	Min: 8 $\frac{5}{8}$ " Max: 60"
Hydraulic Hose	144"
Safety Lock Positions	6
Standard Motor/Voltage	1HP, 115v, 60Hz, 1Ph
Rise Time	45s
Min. Required Bay Size	10' x 22'

STANDARD ADAPTERS



3" EXTENSION BASE
PART # TYJ3-05-02



7" EXTENSION BASE
PART # TYJ3-05-02G

REQUIREMENTS



12' MINIMUM



12' RECOMMENDED



24' RECOMMENDED



208-230V, 1PH, 20A





7K & 9K HOME STORAGE LIFTS

MODEL # CL4P7, CL4P9S, CL4P9X & CL4P9W

Challenger Lifts ALI® Certified, professional-grade home enthusiast lifts with multiple lock positions and 7,000 or 9,000 lb. capacity allows storing and servicing your vehicles efficiently.

85" in ground clearance allows you to store most full-size vehicles underneath for everyday use and our optional Caster Sets add the benefit of portability. **Other options including Rolling Jacks, Jack Trays and Plastic Drip Trays, make these lifts ideally suited for light-duty service.**

REQUIREMENTS

-  **7' RISE + VEHICLE**
-  **14' RECOMMENDED**
-  **28' RECOMMENDED**
-  **115V, 1PH, 20A**



SPECIFICATIONS

MODEL NUMBER	CL4P7	CL4P9S	CL4P9X	CL4P9W
Description	Standard	Standard	Extended Length & Height	Extended Length, Height & Width
Lifting Capacity	7,000 lbs.	9,000 lbs.		
Length Overall	16' 3½"	17' 5½"	19' 5½"	
Width Overall	8' 4½"	9' 4¼"		10' 7¼"
Inside Columns	7' 8½"	7' 11"		9' 2"
Between Columns	12' 3½"	13' 4½"	15' 4¾"	
Height of Columns	6' 7½"	7' ½"	8' ½"	
Height of Runways (Floor to runway)	5¾"	7"		
Width of Runways	20"			
Width Between Runways	38"			
Rise Height (Runway at top lock position)	68⅞"	73¼"	85½"	
Max. Wheelbase	141½"	155"	179"	
Clearance Height	63"	67¾"	80"	
Std. Motor/Voltage	1HP/115v or 2HP/230v			
Min. Rec. Bay Size	10' x 20'	11' x 20'	11' x 22'	14' x 22'
ALI® Certified				

NO AIR REQUIRED

ACCESSORIES

PART NUMBER	DESCRIPTION
CL4P9DT-P	Plastic drip tray set (4)
Q4P09JT	4,500 lb. capacity jack tray
CL4P9ER	50" extended ramps for low-profile vehicles
CL4P9CS	Caster set (4)
Q4P09SP	Storage platform (4)
QRJ03H	Air/hydraulic operated rolling jack - adjustable width, 3,500 lbs. capacity each
RJ4.5	Air/hydraulic operated rolling jack - adjustable width, 4,500 lbs. capacity each



CL4P9DTP



CL4P9JT



CL4P9ER



CL4P09SP



CL4P9CS



RJ4.5



Scan here to see which
of our Home Storage
options fit your needs!



KEVIN LaFLAMME


TYLER WOOLUM

DON GLASER

AARON OWEN

VSA

JUAN FRANCO

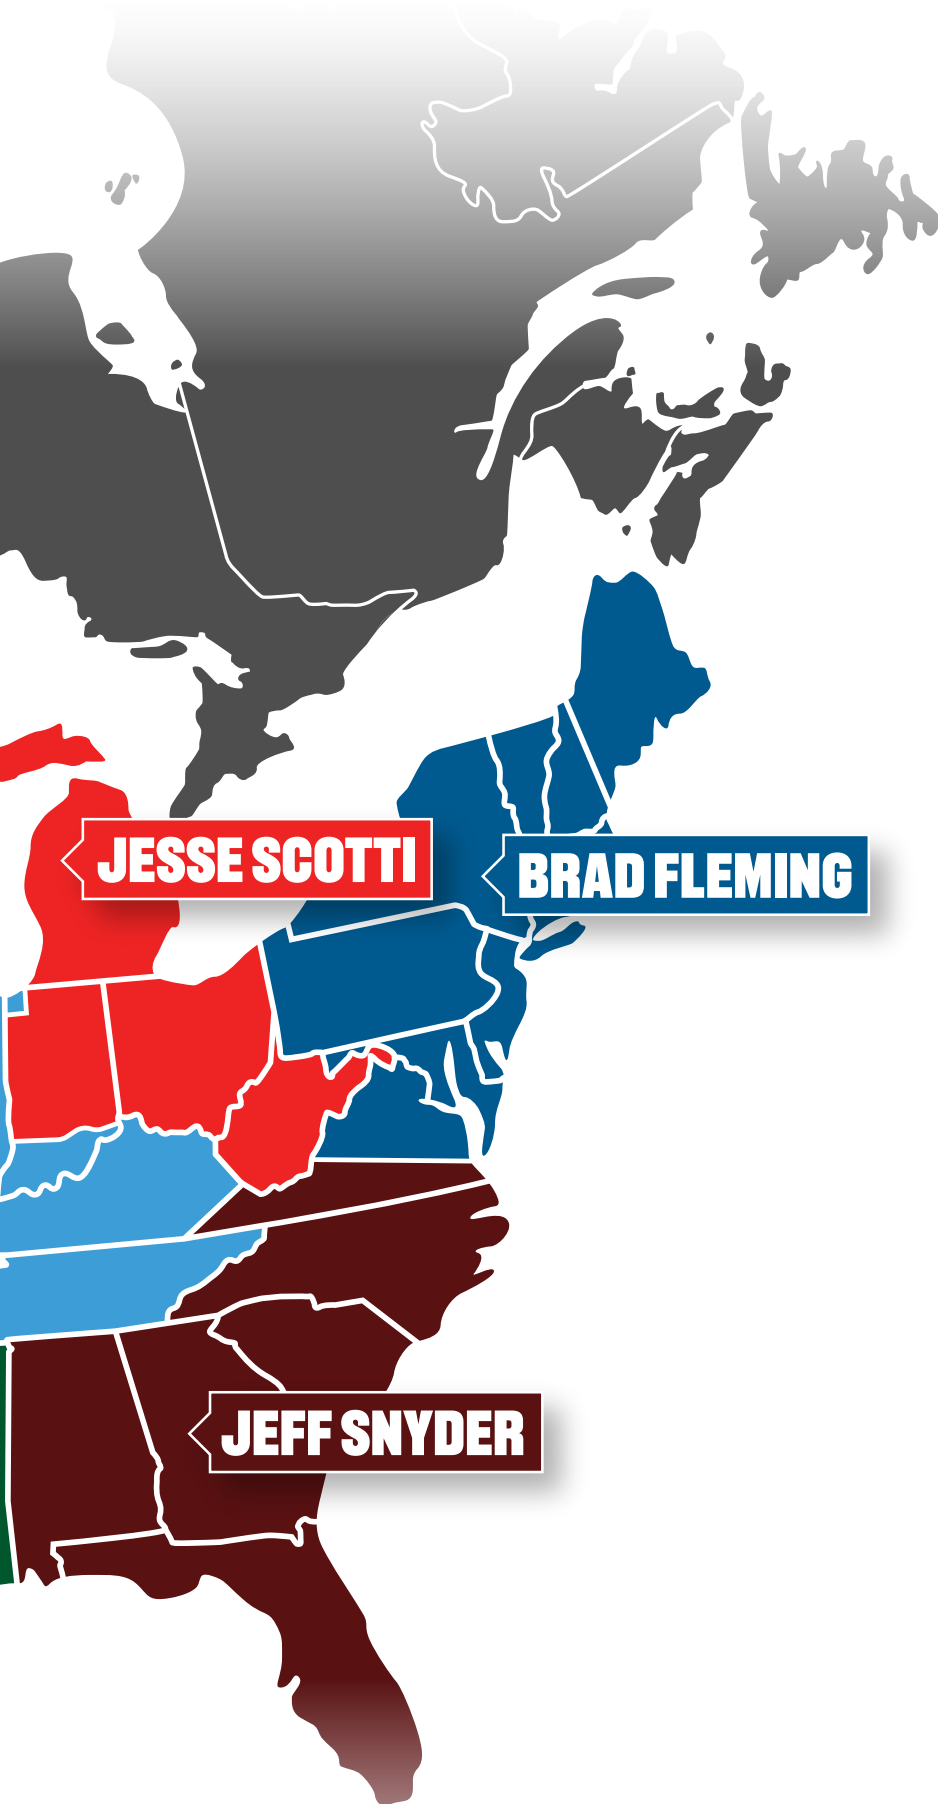

REGIONAL SALES MANAGERS

AARON OWEN

480-684-4036
aarono@challengerlifts.com



BRAD FLEMING

610-731-5267
bradleyf@challengerlifts.com



DON GLASER

847-975-7358
donaldg@challengerlifts.com



JEFF SNYDER

770-490-8415
jsnyder@challengerlifts.com



JESSE SCOTTI

502-523-1522
jesses@challengerlifts.com



JUAN FRANCO

+1 305-205-0940 (USA)
+571 640-8561 | +57 3102481112 (CO)
juan.e.franco@snapon.com



KEVIN LaFLAMME

+1 226-750-7249
kevinl@challengerlifts.com



TYLER WOOLUM

408-314-2129
tylerw@challengerlifts.com



VSA

214-353-0765
tcole@vsareps.com



CUSTOMER CARE & SERVICE

800-648-5438
challengerlifts@soe.freshdesk.com



**PROUD
ALI® MEMBER**



© Challenger Lifts Inc, 2022.
All Rights Reserved
STARTER LINE PRODUCT BROCHURE 09.22

